CORNELL PUMP COMPANY

PRINING SYSTEMS REDI-PRIME® AND VENTURI PRIME







VENTURI PRIME SYSTEM


VALUE PRIMING OPTION + CORNELL QUALITY

The Cornell Venturi Prime system relies on a compressor driven by the pump shaft and lubricated by engine oil to blow air through the venturi and evacuate it from the suction line and pump casing. The venturi prime is economical and compatible with any Cornell Pump where Redi-Prime® is an option.

The Venturi Prime system is slower to prime than Redi-Prime, has superior performance in freezing temperatures, and can be tailored to the application. The Venturi Prime air compressor requires an external source for coolant and lubrication supplies, usually from the engine. Cornell's Venturi Prime system provides an excellent solution where cost is key, but quality is essential.

VENTURI PRIME BENEFITS


- Fully automatic priming and repriming
- Primes with reasonable speed
- Does not impede solids handling of the pump
- Can operate unattended
- Patented Cycloseal® and Run-Dry[™] options
- No change in suction lift capacity and flow rates
- Available with manual valve for operation in colder climates

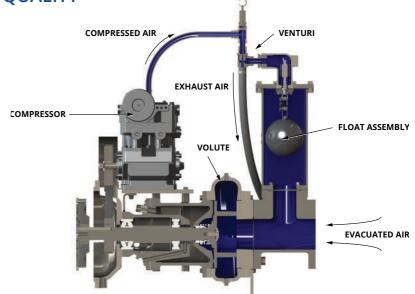



COMPARE REDI-PRIME® AND VENTURI-PRIME				
SYSTEM	PRIMING SPEED	OPERATING TEMPERATURE	COST	CARRY-OVER CONTAINMENT
Redi-Prime®	Up to 50 CFM			Excellent
Venturi Prime	Less than 20 CFM			Fair

REDI-PRIME® SYSTEM

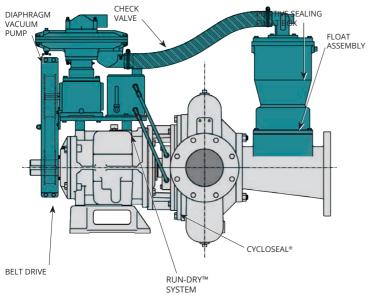

SYSTEM

REDI-PRIME® SYSTEM OVERVIEW

Cornell's Redi-Prime® pumps are designed and engineered for the most rugged and demanding industries - construction, industrial, rental, and municipal. With over 70 years of proven experience and reliability, Cornell Pump Company has established the highest industry standard for premium quality and rugged performance. An industry-leading two-year warranty backs our pumps.

The Redi-Prime system uses a positive-sealing float box and a diaphragm vacuum pump to provide fully automatic priming and re-priming of the pump. There is no water carry-over to contaminate the environment,) and Redi-Prime is compatible with most Cornell pump models.

REDI-PRIME® BENEFITS

- Fully automatic¬priming and repriming
- Handles air/liquid mixtures with ease
- Rapidly primes and re-primes completely unattended
- Environmentally safe priming system designed to prevent product leakage
- Patented Cycloseal® and Run-Dry™ options
- Does not impede solids handling of pump
- No change in suction lift capacity and flow rates
- Check valve eliminates any liquid carry over



CORNELL PUMP COMPANY

MARKET & PRODUCT LINE





AGRICULTURE



FOOD PROCESS









WATER



INDUSTRIAL MINING

MUNICIPAL

REFRIGERATION TRANSFER

CONSTRUCTION









CUTTERS



SELF PRIMING







N SERIES

SLURRY

SLURRY SM

MANURE





MX SERIES



CYCLONE™

EDGE™

HYDRAULIC SUBS

IMMERSIBLE

CD4MCU

RUN-DRY™

PRIMING **SYSTEMS**

CYCLOSEAL®

Cycloseal® and Redi-Prime® are Registered Trademarks of Cornell Pump Company.

Cornell pumps and products are the subject of one or more of the following U.S. and foreign patents:

6,074,554; 6,036,434; 6,079,958; 6,309,169; 6,104,949.

23 - EV - BR - 701

CORNELLPUMP.COM ©2023 CORNELL PUMP COMPANY







Cornell Pump Company Clackamas, Oregon, USA P: +1 (503) 653-0330 F: +1 (503) 653-0338





Source Pumps PTY LTD 22 Peterpaul Way Truganina, VIC 3029 sourcepumps.com.au sales@sourcepumps.com.au